



## Workstation for document reading Regula 70X9



**Full page passport reader with no moving parts inside.**

**Automatic reading and authenticity verification of passports, IDs, visas, driver's licenses and other identification documents.**

**Optical character recognition, reading of barcodes, RFID and SmartCard chips.**

**Full data processing onboard with a built-in PC.**



A small-sized compact reader for desktop use. The body is made of hard plastic. Full data processing onboard with a built-in PC. Video output for connection to an external monitor. Four USB ports for connection of external devices. LAN connection. No moving parts. Reliable, convenient and easy-to-use.

The device allows capturing images in white, infrared, ultraviolet and coaxial lights. Certain models are equipped with modules for reading RFID chips and smart cards. The device is supplied with software development kit (SDK) for easy integration into existing end-user systems.

Reader Regula 70X9 can be optionally equipped with a built-in USB Multi Touch Monitor.

## Functionality

- Capturing and processing images
  - supported document formats
    - ID-1
    - ID-2
    - ID-3
    - other documents with maximum size 88×128 mm
  - automatic detection of a document in a scanning zone
  - automatic scanning after document detection
  - elimination of glare from laminate and holograms in white and IR light
  - compensation of external light hitting during image capture in ultraviolet light (*Smart UV*)
  - automatic selection of UV illumination intensity according to the document type
  - search and cropping of a document image from a general image
- The MRZ detection and recognition
- Recognition and reading of 1D and 2D barcodes
- Automatic recognition of a document type
- Processing graphic fields
- OCR of the visual zone
- Reading RFID tags
- Analyzing and comparing text data
- Automatic authenticity verification of a document

## Operation

1. The optical reader automatically detects a document in the scanning area of the device.
2. Document images are captured in different illumination modes. At the same time data is read from RFID tags and smart cards.
3. **Regula Document Reader SDK** processes data.
4. Results of the verification are ready for further use.

## Application

- Border control services
- Aviation security services
- Law-enforcement agencies
- Immigration services
- Financial institutions
- Hotels
- Car rental and leasing companies
- Cellular companies
- Business centers security service
- Event-agencies
- Medical institutions
- Tourist agencies



- Ticket offices
- Visa support agencies and consulates
- Insurance companies
- Casino security service

### **Additional functions**

- Video output for connection to an external monitor
- Four USB ports for connection of external devices
- LAN connection
- Programmable indicators of the device status:
  - multicolour LED indicator - red, yellow, green
  - buzzer

### **Delivery Set**

- **Regula Document Reader SDK**
- Windows 7 / Windows 8 / Windows 10



Functionality		Model								
		7009.10 0	7009.11 0	7009.11 1	7029.10 0	7029.11 0	7029.11 1	7039.10 0	7039.11 0	7039.11 1
Optical reader light sources	White	+	+	+	+	+	+	+	+	+
	Infrared 870 nm; optionally: 950 nm	+	+	+	+	+	+	+	+	+
	Ultraviolet 365 nm		+	+		+	+		+	+
	Coaxial white			+			+			+
Reader of radio frequency identification devices (RFID)					+	+	+	+	+	+
Smart card reader								+	+	+

### Optical reader

- Scanning area, mm — 88×128: full passport page
- Video sensor:
  - type — CMOS
  - colour model — RGB
  - colour depth, bit — 24

Number of megapixels	3,1	5
Resolution, ppi	400 ± 3%	500 ± 3%
Frame size, pixels	2048×1536	2592×1944

### Reader of radio frequency identification devices (RFID) for models Regula 7029.XXX, 7039.XXX

- Supported standards — ISO 14443: type A and B
- Data exchange rate, Kbaud — 106, 212, 424, 848
- Reading an RFID tag regardless of its position in the document
- Anti-collision: reading an RFID tag according to the MRZ

### Smart card reader for model Regula 7039

- Supported standards — ISO/IEC 7816-1, -2, -3, -4; EMV2000 4.1, Level 1
- Data exchange rate, Kbaud — 2-500
- Smart card type — asynchronous, T = 0 and T = 1

### Built-in PC

- Processor:
  - Intel® Core™ i5-4250U with active fan heatsink (1.3 GHz with turbo capability to achieve 2.6 GHz, 3 MB smart cache)
- Graphics:
  - Intel® HD Graphics 5000
  - One Mini DisplayPort 1.2 supporting ultra-high definition 4K displays and multiple monitor functionality
  - One Mini HDMI 1.4a port
- HD:
  - SSD 128 GB
- Memory:



- 8 GB 1600/1333 MHz DDR3L
- Peripheral Connectivity:
  - Intel 10/100/1000 Network Connection
  - 2 Super Speed USB 3.0 ports (back panel ports)
  - 2 Hi-Speed USB 2.0 ports (front panel ports)
- Front panel:
  - Reset, HDD LED, Power LED, power on/off

### Device technical specifications

- Overall dimensions (length×width×height), mm:
  - **Regula 7009, 7029** — 179×160×135
  - **Regula 7039** — 190×160×135
- Weight, not more than, kg — 1,5
- Power supply, V — 19
- Nominal current consumption, A, max — 1,8



## Document reader software development kit (SDK)

SDK (**Full**) consists of three modules:

- Basic – supplied together with a device by default
- VizOCR – reading textual fields from a document page
- AAC – automatic authenticity control

VizOCR and AAC modules are optional and used to extend the functionality of Basic module.

Updates for SDK are provided regularly. Basic module has unlimited support. VizOCR and AAC are updated on subscription basis.

Functionality		Full SDK modules		
		Basic (supplied by default)	VizOCR	AAC
<b>Document image capture and processing</b>				
Document formats	<ul style="list-style-type: none"> <li>• ID-1 (identity card)</li> <li>• ID-2 (passport card, visa)</li> <li>• ID-3 (passport)</li> <li>• other document formats up to 88×128 mm</li> </ul>	+		
Scanning process	<ul style="list-style-type: none"> <li>• document detection sensor</li> <li>• automatic scanning after document detection</li> <li>• elimination of glare from laminate and holograms for white and infrared illumination</li> <li>• compensation of external light hitting during image capture in UV light (Smart UV)</li> <li>• automatic intensity selection of UV illumination for a certain document type</li> <li>• search and cropping of a document image from a received image</li> </ul>	+		
<b>Machine readable zone (MRZ)</b>				
Supported MRZ formats	<ul style="list-style-type: none"> <li>• in conformity with ICAO 9303:               <ul style="list-style-type: none"> <li>◦ 44×2</li> <li>◦ 30×3</li> <li>◦ 36×2</li> </ul> </li> <li>• in conformity with ISO IEC 18013 (IDL):               <ul style="list-style-type: none"> <li>◦ 30×1</li> </ul> </li> <li>• support of special MRZ data structure for documents of certain countries</li> </ul>	+		
Features	<ul style="list-style-type: none"> <li>• search for the MRZ along the whole document image</li> <li>• MRZ recognition in infrared and white light</li> <li>• control of check digits and data structure in conformity with the requirements of ICAO 9303 and BSI TR-03105 Part 5.1</li> <li>• evaluation of MRZ quality specifications in conformity with ICAO 9303, ISO 7501, 1831, 1073-2 standards</li> </ul>	+		
<b>Barcodes</b>				
Supported formats	<ul style="list-style-type: none"> <li>• 1D: Codabar, Code39 (+extended), Code93, Code128, EAN-8, EAN-13, IATA 2 of 5 (Airline),</li> </ul>	+		



	<ul style="list-style-type: none"> <li>Interleaved 2 of 5 (ITF), Matrix 2 of 5, STF (Industrial), UPC-A, UPC-E</li> <li>• 2D: PDF417</li> <li>• 2D on request: Aztec Code, QR Code, Datamatrix</li> </ul>			
Authentication	<ul style="list-style-type: none"> <li>• barcode format check</li> </ul>			+
<b>Automatic document type recognition</b>				
Order of document type recognition	<ul style="list-style-type: none"> <li>• Country→Type→Series</li> </ul>		+	+
Features	<ul style="list-style-type: none"> <li>• receiving a document template from the SDK database containing the following information: <ul style="list-style-type: none"> <li>◦ text and graphic fields position</li> <li>◦ availability of barcodes and security features</li> <li>◦ authenticity verification and its parameters</li> <li>◦ RFID-chip availability</li> <li>◦ a reference image from Information Reference Systems «<a href="#">Passport</a>», «<a href="#">Autodocs</a>», «<a href="#">Frontline Documents System</a>»</li> </ul> </li> <li>• processing of the received document images in compliance with the sample, including document image rotation by the angle given in the sample</li> </ul>		+	+
<b>Graphic fields processing</b>				
Types of graphic fields	<ul style="list-style-type: none"> <li>• portrait of the document holder</li> <li>• signature</li> <li>• barcode</li> <li>• fingerprint, etc.</li> </ul>	+		
Features	<ul style="list-style-type: none"> <li>• cropping and displaying graphic fields as separate images in compliance with the sample of the corresponding document</li> <li>• automatic searching of faces on the document image and cropping the document holder portrait if the document type is not recognized</li> <li>• document image rotation according to the document holder portrait position</li> </ul>	+		
<b>OCR of the visual zone</b>				
Recognition of character sets	<ul style="list-style-type: none"> <li>• Central European and Eastern European Latin (1250)</li> <li>• Cyrillic (1251)</li> <li>• Western European Latin (1252)</li> <li>• Greek (1253)</li> <li>• Turkish (1254)</li> <li>• Baltic (1257)</li> <li>• other fonts of any size</li> </ul>		+	
Features	<ul style="list-style-type: none"> <li>• dictionary support (name, surname, address, country, etc.)</li> <li>• automatic text division into separate fields (e.g. dividing the address into postal code, country, state, etc.)</li> <li>• recognition of dates with complex formats</li> <li>• recognition of characters from different character sets in one line</li> </ul>		+	
<b>RFID SDK</b>				
Supported RFID-chip standards	<ul style="list-style-type: none"> <li>• ISO/IEC 14443-2 (type A and B)</li> <li>• ISO/IEC 14443-3 (MIFARE® Classic Protocol)</li> <li>• ISO/IEC 14443-4</li> </ul>	+		




Data access modes	<ul style="list-style-type: none"> <li>• Direct</li> <li>• BAC</li> <li>• EAC</li> <li>• PACE</li> <li>• SAC</li> </ul>	+		
Authentication	<ul style="list-style-type: none"> <li>• active (AA)</li> <li>• passive (PA)</li> <li>• chip (CA v1, CA v2)</li> <li>• terminal (TA v1, TA v2)</li> </ul>	+		
Supported applications	<ul style="list-style-type: none"> <li>• ePassport (DG1–DG16)</li> <li>• eID (DG1–DG21)</li> <li>• eSign</li> <li>• eDL (DG1–DG14)</li> </ul>	+		
Certificate management	<ul style="list-style-type: none"> <li>• local storage</li> <li>• receiving certificates online through the program interface</li> <li>• Master List, CRL support</li> </ul>	+		
Features	<ul style="list-style-type: none"> <li>• reading RFID chips with extended length support</li> <li>• reading RFID chips in compliance with ICAO LDS 1.7, PKI 1.1 data formats</li> <li>• certified by BSI TR-03105 Part 5.1, BSI TR-03105 Part 5.2</li> </ul>	+		
<b>Analysis and comparison of text data</b>				
Document areas for cross-checking of the readout data	<ul style="list-style-type: none"> <li>• MRZ</li> <li>• VIZ</li> <li>• RFID-chip</li> <li>• barcode</li> <li>• contact chip (Smart Card)</li> </ul>	+		
Verification	<ul style="list-style-type: none"> <li>• validity of any dates</li> <li>• authenticity of names and surnames according to lists of wordstops</li> <li>• zero numbers of sample documents</li> </ul>	+		
Adjustment of formats and measuring units to those used in the user OS	<ul style="list-style-type: none"> <li>• date</li> <li>• weight</li> <li>• height, etc.</li> </ul>	+		
Features	<ul style="list-style-type: none"> <li>• complete or partial comparison of fields</li> <li>• integration of data received from several document pages</li> <li>• calculated field support (age, etc.)</li> <li>• transliteration to Latin characters in compliance with ICAO 9303 standards for comparison with the MRZ</li> </ul>	+		
<b>Authenticity verification</b>				
Operation available for any document	<ul style="list-style-type: none"> <li>• checking luminescence (UV Dull Paper) of: <ul style="list-style-type: none"> <li>◦ the form</li> <li>◦ the MRZ area</li> <li>◦ the portrait area</li> </ul> </li> <li>• checking the MRZ print contrast in compliance with ICAO 9303 (IR B900 Ink)</li> </ul>			+
Operations available after document type recognition	<ul style="list-style-type: none"> <li>• checking image patterns in white, IR and UV light</li> <li>• checking luminescence of UV protection fibers</li> <li>• detection of false luminescence</li> <li>• checking photo embedding type: printing or attachment</li> </ul>			+






	<ul style="list-style-type: none"> <li>• checking IR Visibility of: <ul style="list-style-type: none"> <li>◦ elements of the form</li> <li>◦ text data</li> <li>◦ the photograph (main and additional)</li> </ul> </li> <li>• detection of holograms (OVD), OVI</li> <li>• reading a luminescent text and comparing it with the data obtained from the MRZ and VIZ (OCR Security Text)</li> <li>• visualization of IPI (Invisible Personal Information)</li> <li>• checking retroreflective protection</li> <li>• checking barcode format</li> </ul>			
Features	<ul style="list-style-type: none"> <li>• checking operations are adjusted to documents with different degrees of wear and tear</li> <li>• the choice of checking operations depends on security features available in a questioned document</li> </ul>			+
<b>Additional SDK functions</b>				
Image formats	<ul style="list-style-type: none"> <li>• .BMP</li> <li>• .JPG</li> <li>• .JP2</li> <li>• .PNG</li> <li>• .TIF</li> <li>• other image formats are possible on request</li> </ul>	+		
Interoperability	<ul style="list-style-type: none"> <li>• comparison modules: <ul style="list-style-type: none"> <li>◦ fingerprint images from RFID chip and external fingerprint scanner</li> <li>◦ face images from document data page and/or RFID chip</li> </ul> </li> <li>• Information Reference Systems «<a href="#">Passport</a>», «<a href="#">Autodocs</a>», «<a href="#">Frontline Documents System</a>»</li> </ul>	*		
OS compatibility	<ul style="list-style-type: none"> <li>• Microsoft Windows XP (SP3), Windows 7 (x86, x64), Windows 8, Windows 10</li> </ul>	+		
Drivers	<ul style="list-style-type: none"> <li>• Microsoft certified</li> </ul>	+		
Features	<ul style="list-style-type: none"> <li>• simultaneous optical scanning and RFID chip reading</li> <li>• firmware upgrade via USB interface (automatic upgrade after installing new SDK version)</li> <li>• multilingual interface</li> </ul>	+		
<b>Software updates</b>				
SDK	<ul style="list-style-type: none"> <li>• twice a year</li> </ul>	*		
Document template database	<ul style="list-style-type: none"> <li>• monthly</li> </ul>	*		

\* – on request / individual agreement

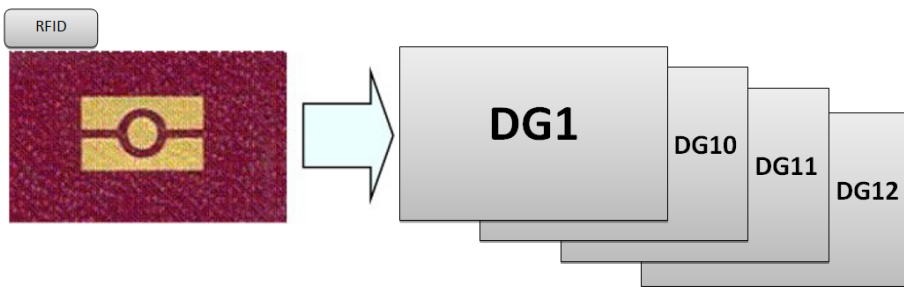


Document data readout: textual data readout

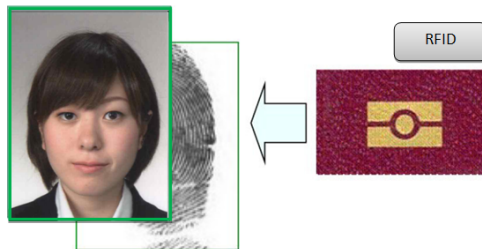


Document data readout: graphic data readout




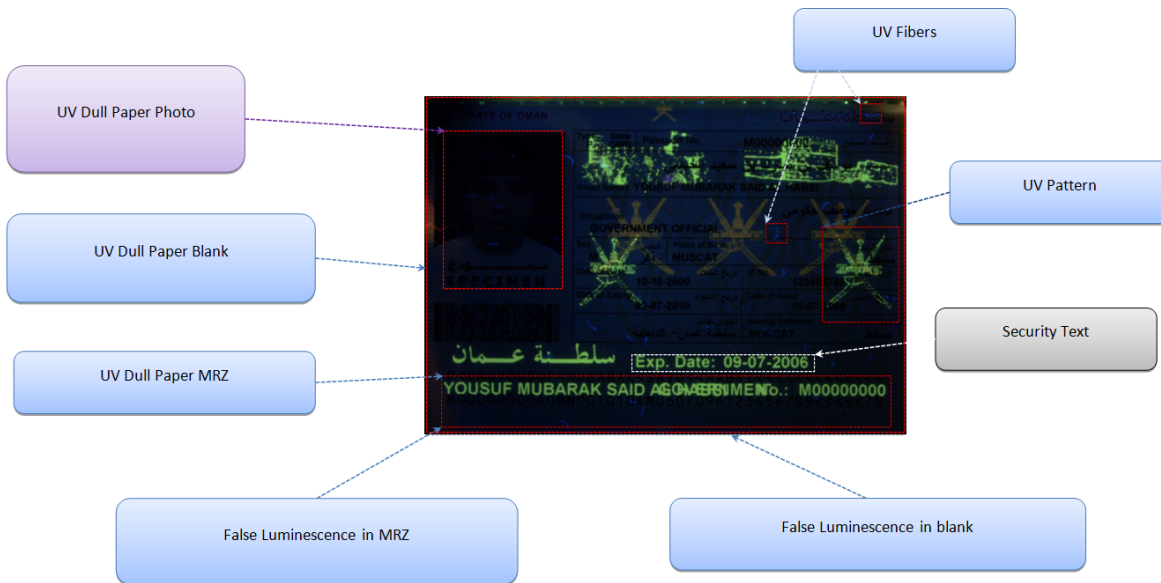


Performed security checks in ultraviolet light

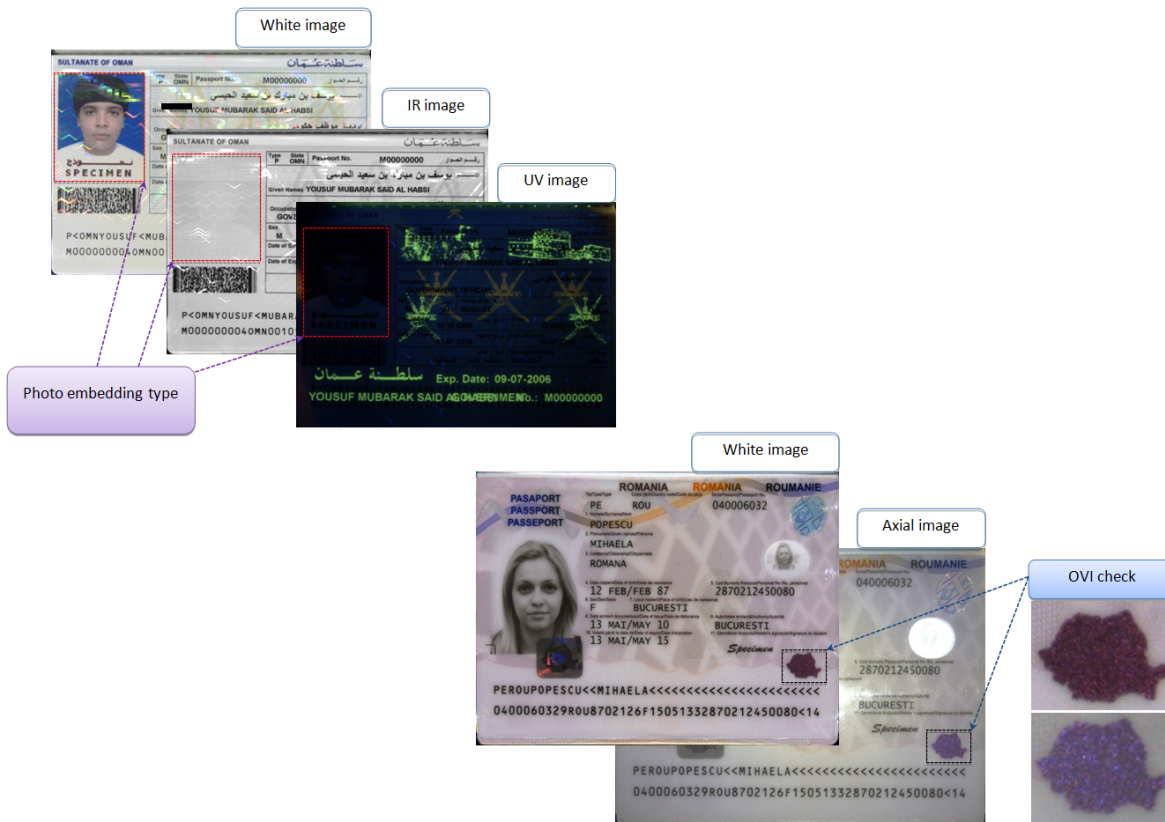


Performed security checks in different lights

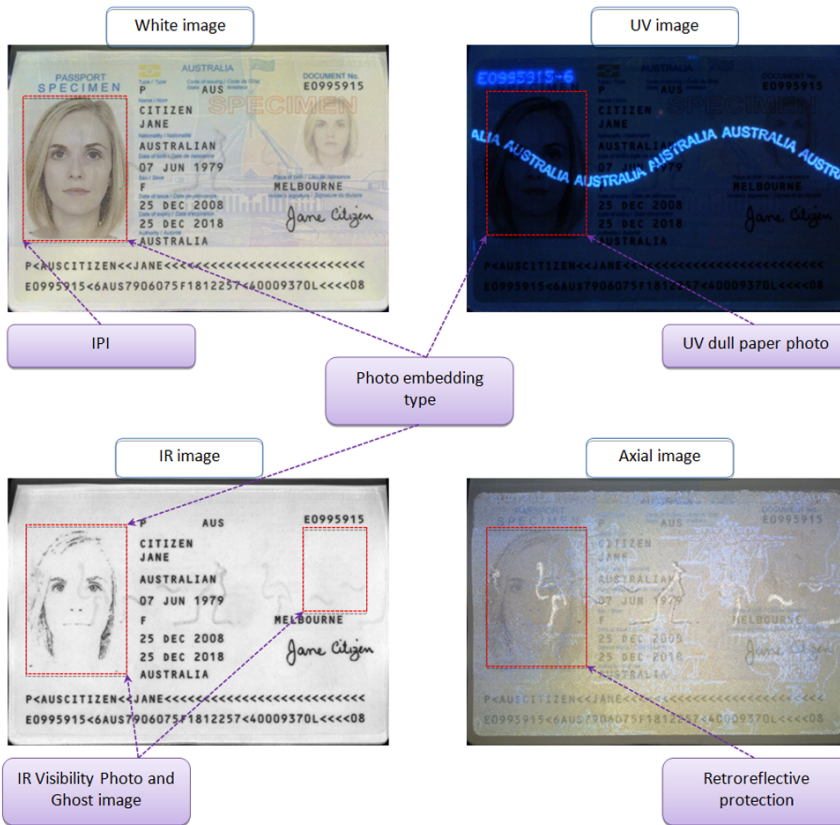

Checking photo embedding type: printing or attachment

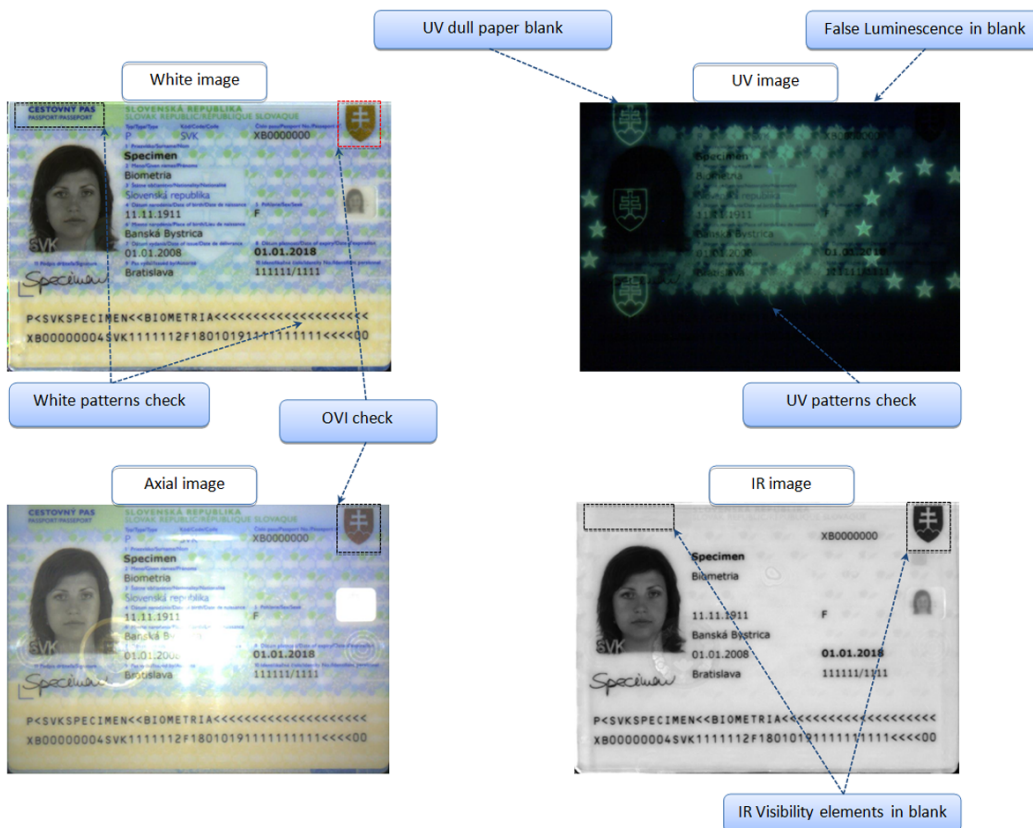

Checking the blank of the document

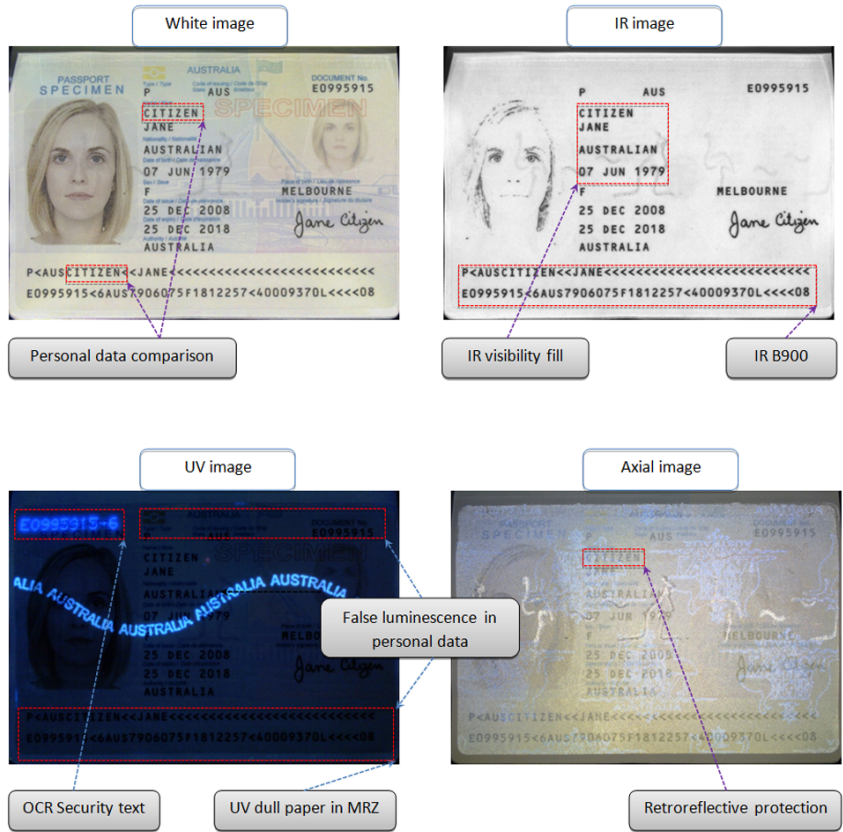

Checking the personal data



Viewing the passport from IRS database









Document Reader

File View Help

Connected Disconnect Process Read RFID Options Documents DB

Images

33 Rotate images

WHITE IR UV

Details

MRZ Visual zone RFID-chip Text data comparison Graphic data comparison Security Features Messages log

Field type

RFID-chip Visual zone

Portrait (Republic of Korea - ePassport #2)

Results

Optical

Document Class Issuing State Document type

PM KOR Republic of Korea - ePassport #2

Document # M24403909 Date of birth 01.01.1975 Date of expiry 10.03.2018 Sex M

Surname And Given Names HONG KIL DONG

Overall result MRZ Document type Text data comparison Security Features

Overall result

RFID

DG

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16

EF.COM EF.SOD EF.CVCA

Overall result BAC PACE CA TA AA PA

Document processing is finished

004.223 IDR SDK v.4.8 RFID SDK v.3.1 R10.15

Graphic data comparison of the passport

Document Reader

File View Help

Connected Disconnect Process Read RFID Options Documents DB

Images

47 Rotate images

WHITE IR UV

Details

MRZ Visual zone RFID-chip Text data comparison Graphic data comparison Security Features Messages log

Security text

Document # Etalon type Result

IR 8900 PM MRZ Photo element Blank element

IR transparency

Element #1

Blank element Visible

Etalon image

Image

Element #2

Blank element Visible

Etalon image

Image

Document processing is finished

010.280 IDR SDK v.4.8 RFID SDK v.3.1 R10.15

Security features of the passport



Document Reader

File View Help

Connect Disconnect Process Read RFID Options Documents DB

Images

40% Rotate images

WHITE IR UV

Details

Visual zone RFID-chip Text data comparison Graphic data comparison Security Features Messages log

Element #5

Filing element

Etalon image

Image

Images patterns

Element #1

Similarity 97%

Etalon image

Image

Photo embedding type

Document processing is finished

0.10.280 DR SDK v.4.8 RFID SDK v.3.1 R10.15

Security features of the passport